



KILLIAN 26

SCONCES WALL

ADA

COMPLIANT

location:
DAMP

SPECIFICATIONS:

DESCRIPTION

Wall-mounted **ADA-compliant** sconces featuring closed-ended handcrafted glass.

LAMPING

Standard: 3x 40W G9 Halogen 120V, suitable for dimming, lamp included.
LED: 5W LED Replaceable source 120V, non-dimmable, 80+ CRI, 3000°K CCT, 500 lumens, 30,000 hours, lamp included.
Optional fluorescent configuration available (see ordering).

DIFFUSER

Diffuser shall be handcrafted Satin White glass.

CONSTRUCTION



Steel fitter with white powder coat finishes. Glass is secured by steel set screws.

MOUNTING

Installs directly to a 4" octagonal outlet box, centered on fixture.
75°C supply wire required for incandescent lamping.
Orient horizontal or vertical, wall-mount only.

LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only).

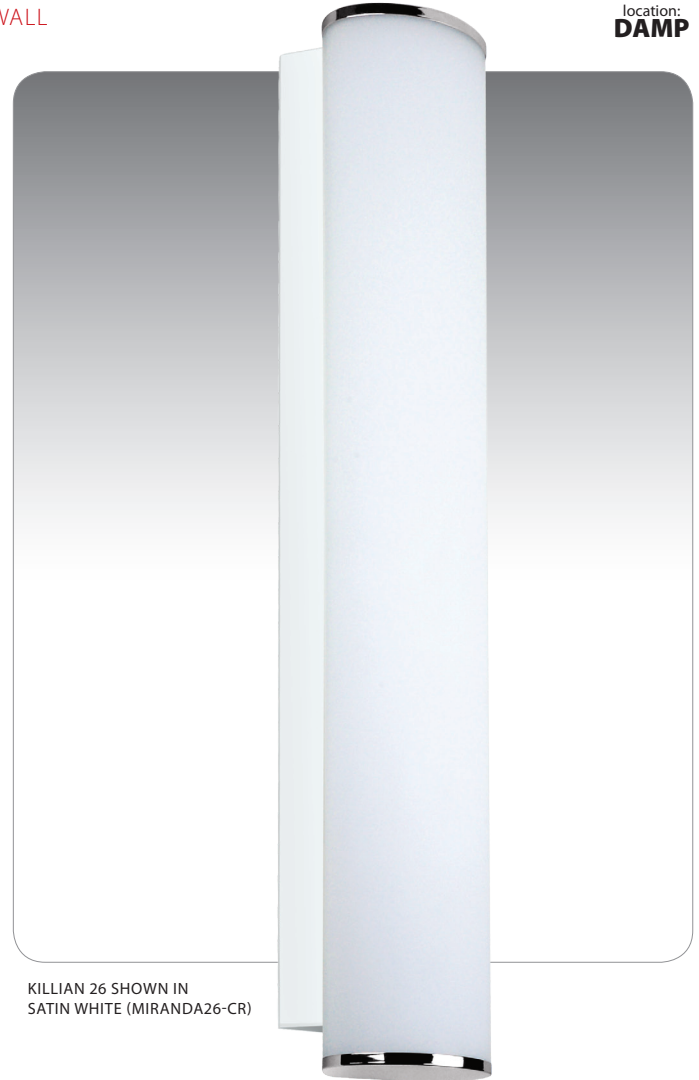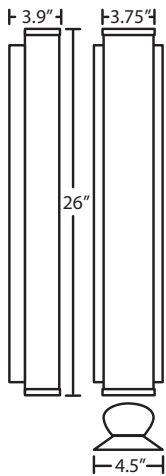

KILLIAN 26 SHOWN IN SATIN WHITE (MIRANDA26-CR)

ORDERING:

FIXTURE	LAMP OPTIONS	METAL FINISH
KILLIAN26 Sconce	(blank) 3x 40W G9 Halogen 124T5 24W T5 120/277V LED 3x 5W LED 120V, non-dimmable	CR Chrome SN Satin Nickel

Ex. KILLIAN26-CR

Killian 26 Wall Sconce w/ Satin White Glass, Chrome Finish

Project Information:

All dimensions provided are nominal. Allowance must be made for dimensional tolerance in handcrafted glasses.

REV 4/17